


TW860-960-L64-22-B40

UHF Tag

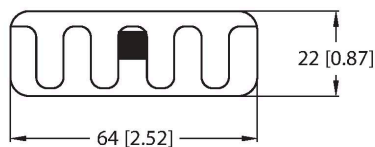

Features

- UHF RFID tag for ironing on textiles
- EEPROM, memory 40 byte
- TID serial number: 6 byte
- Not for direct mounting on metal

Functional principle

The UHF read/write heads form an air interface the size of which may vary, depending on the combination of read/write head and tag.

The read/write distances mentioned here only represent standard values measured under laboratory conditions and free from any influences caused by materials.

Attainable distances may vary due to component tolerances, mounting conditions, ambient conditions and material qualities, especially when mounted in metal. Testing of the application under real operating conditions is therefore essential, especially with read/write on-the-fly!

Technical data

Type	TW860-960-L64-22-B40
ID	100004052
Remark to product	Not suitable for direct mounting on metal
Data transfer	Alternating electromagnetic field
Technology	UHF RFID
Region (UHF)	Global (860...960 MHz) ETSI (865...868 MHz) FCC (902...928 MHz)
Reading range	5 m (2W ERP)
Memory type	EEPROM
Chip	Impinj Monza 5
Memory	40 Byte
Memory	Read/Write
Freely usable memory	0 Byte
EPC memory	16 byte
Number of read operations	unlimited
Number of write operations	10 ⁵
Typical read time	2 ms/Byte
Typical write time	3 ms/Byte
Radio communication and protocol standards	ISO 18000-63 EPCglobal Gen 2
Temperature during read/write access	-40...+85 °C
Temperature outside detection range	-40...+85 °C
	120 °C, 1 × 100 h
Design	Smart Label
Housing length	64 mm
Housing width	22 mm
Packaging unit	1

Mounting instructions/Description

