


CL50GRYAOS3PQ

LED signal light
Tower light

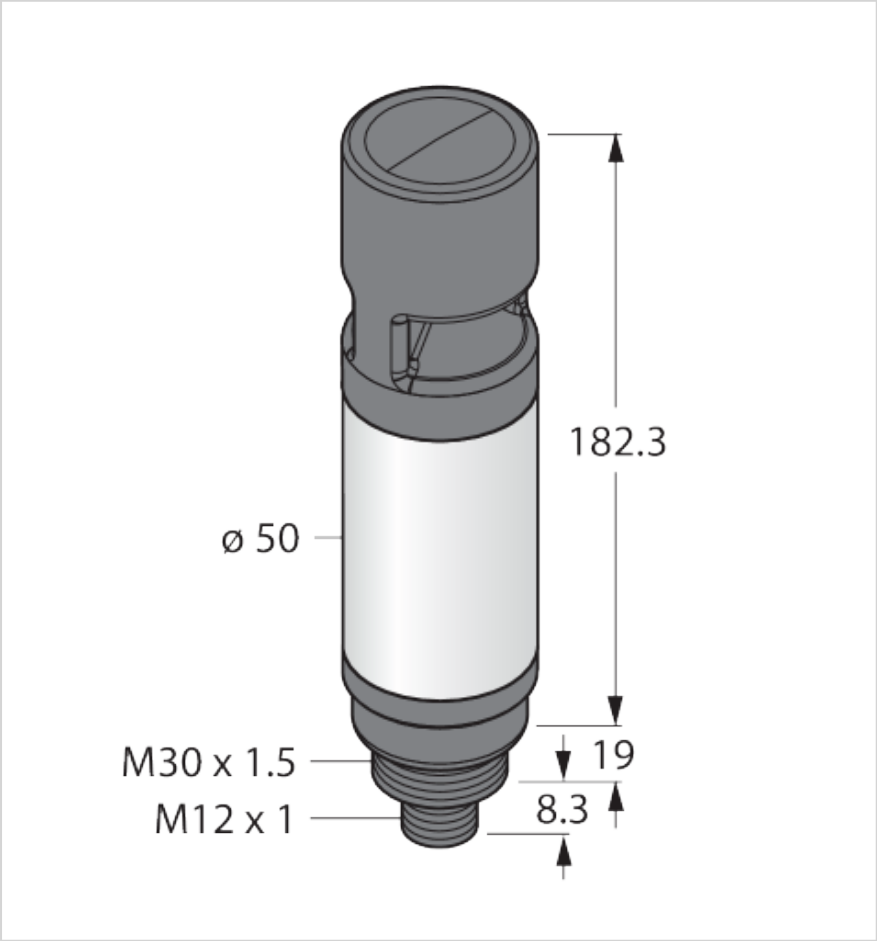

Type designation	CL50GRYAOS3PQ
Ident-No.	3084962

Technical data

General data	
Purpose	LED indicator light
Signal and Display Data	
Features of color 1	Green, Permanently on, 72 lm
Features of color 2	Red, Permanently on, 38 lm
Features of color 3	Yellow, Permanently on, 30 lm
Acoustic signal	Pulsed
Number of colors/segments	3

Features

- LED tower light with beeper and volume control
- Individually controllable
- M30 × 1.5 mechanical screw-in thread
- Protection class IP67
- Colors: Green (COL 1)/Red (COL 2)/Yellow (COL 3)

Functional principle


Multicolor multifunction acoustic signaller
Rugged and well-priced LED tower, easy to install
Illuminated segments for clear operator guidance and display of system status.

Technical data

Volume	99 dB
Power supply	
Operating voltage U_B	18...30 VDC
Electrical data	
Output function	5-wire
Max. current consumption of beeper	45 mA
Max. current consumption per color	100 mA
Response time typical	<10 ms
Inputs	
Input type	PNP
Mechanical data	
Design	Smooth barrel
Construction type designation	CL50
	ø 50 mm
Dimensions	182,2 mm
Housing material	Plastic, ABS/Polycarbonate, Black
Electrical connection	Connector, M12 x 1
Cascadable	No
Window material	Polycarbonate, diffuse
Cable	
Core cross-section	5
Cable Jacket Material	PVC
Ambient conditions	
Ambient temperature	-20...+50 °C
Relative humidity	0...95 %
Protection class	IP67
Tests/approvals	
Approvals	CE, UL listed
Displays/controls	
Dimmable	No

Display of up to 3 colors.
 Compact devices, no controller required
 No mounting
 The wiring diagram shows the PNP input configuration. An instruction leaflet with detailed information about the connection is included with the devices.

Connection accessories

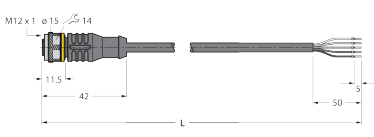RKC4.5T-2/TEL	6625016
	
WKC4.5T-2/TEL	6625028
