


K30LWYBPPB2Q

LED signal light
Beacon
With Integrated Button

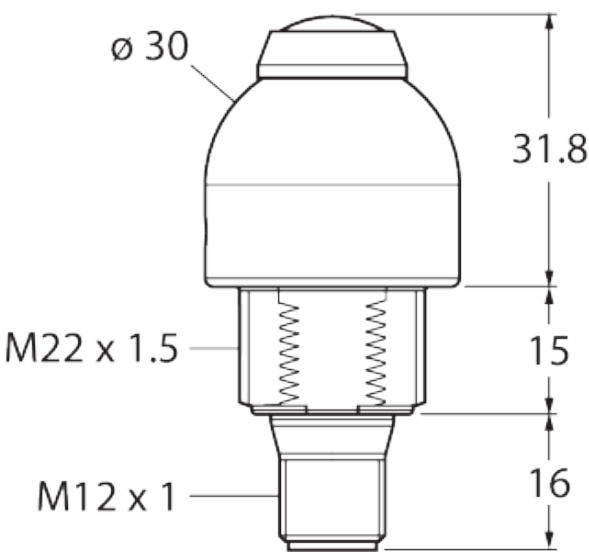

Type designation	K30LWYBPPB2Q
Ident-No.	3087144

Technical data

General data	
Purpose	LED indicator light
Signal and Display Data	
Features of color 1	White, Permanently on
Features of color 2	Yellow
Features of color 3	Blue
LED service life (L70)	50000 h

Features


- All-round LED display
- Individually controllable
- Mechanical screw thread M22x1.5
- Protection class IP67
- Colors: White (COL 1) / Yellow (COL 2) / Blue (COL 3)
- Pushbutton closes potential-free contacts on Pin 1 (WH) and Pin 5 (GY)
- M12 × 1 male connector
- Operating voltage 10...30 VDC

Technical data

Number of colors/segments	3
Switch Function	Momentary
Power supply	
Operating voltage U_B	10...30 VDC
Electrical data	
Output function	4-wire, normally open NO, Potential-free
DC rated operational current	≤ 25 mA
Max. current consumption per color	40 mA
Response time typical	<10 ms
Inputs	
Input type	PNP
Mechanical data	
Design	Dome
Construction type designation	K30L
	$\varnothing 30$ mm
Dimensions	62,8 mm
Housing material	Plastic, PC Thermoplastic material, Black
Electrical connection	Connector, M12 x 1
Cascadable	No
Window material	Polycarbonate, diffuse
Cable	
Core cross-section	8
Cable Jacket Material	PVC
Ambient conditions	
Ambient temperature	-40...+50 °C
Protection class	IP67
Tests/approvals	
Approvals	CE
MTTF	626 Years acc. to SN 29500 (Ed. 99) 40 °C
Displays/controls	
Dimmable	No


Mounting accessories

SMB22A	3079414
--------	---------

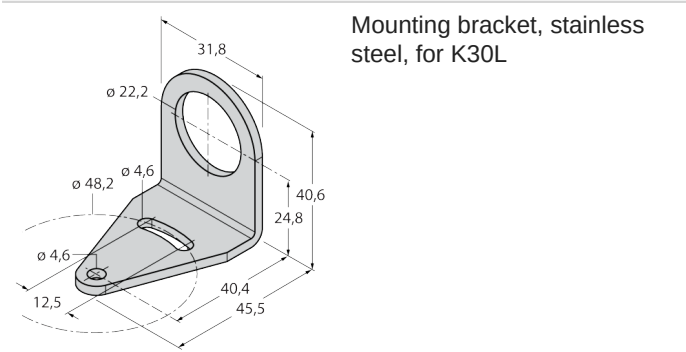

Connection accessories

RKC8T-2/TEL	6625130
-------------	---------

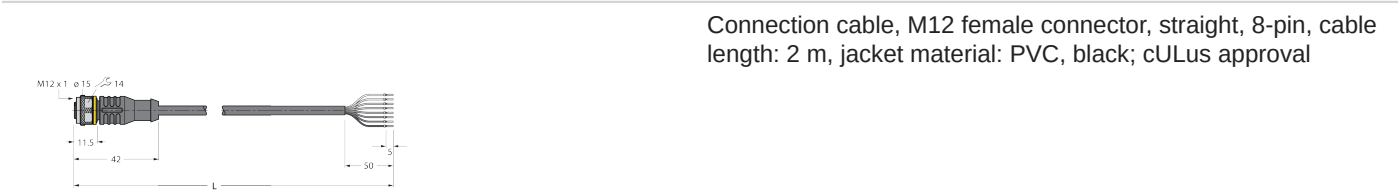

WKC8T-2/TEL	6625133
-------------	---------

