


DX80N2Q45U

Radio Transmission System Transfer of I/O Data to Star Topology Node for Connecting External Sensors

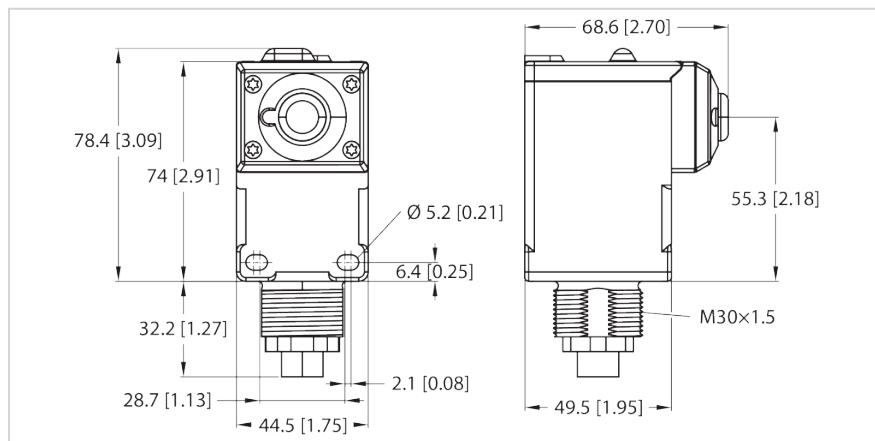

Type designation	DX80N2Q45U
Ident-No.	3800203

Technical data

General data	
Device type	Wireless sensor
Special features	wireless
Detection area/measuring range	
Range	1000000 mm
Radio data	
Channel width	2 MHz
Installation	stationary
Number of radio channels	27
Output power EIRP	18 dB/65 mW
Output power ERP	18 dB/65 mW
Single-Carrier Residence Time	7,8 ms
Spread spectrum technology	FHSS (Frequency Hopping Spread Spectrum)
Topology	Star topology
Type of radio	short-range
Power supply	
Operating voltage U_B	3.6...5,5 VDC



Features

- Protection class IP67
- Mechanical screw-in thread M30 × 1.5
- Connection via M12 × 1 female connector, 4-pin
- Integrated multi-color indicator light
- 2.4 GHz frequency band
- Frequency hopping (FHSS)
- Time Division Multiplex Access (TDMA)
- Operating voltage: 3.6...5.5 VDC
- Current consumption: ≤ 100 µA
- Supply via 2x 3.6 V Li-ion AA batteries, supplied with the device
- FCC-ID UE300DX80-2400- This device complies with FCC para. 15, subpara. C, 15.247 ETSI/EN: In compliance with EN 300 328: V1.7.1 (2006-05)IC: 7044A-DX8024
- Radiation protection 10 V/m for 80... 2700 MHz acc. to EN 61000-6-2

Technical data

Electrical data	
Output function	4-pin
Short-circuit protection	yes
Wire break/reverse polarity protection	yes
DC rated operational current	≤ 0,1 mA
Frequency band	2.4-GHz ISM band
Frequency range	2.402...2.483 GHz
Response time typical	<250 ms
runs with battery	Yes
Interfaces	
Communication protocol	1-wire-serial
Inputs	
Input type	1-wire serial
Digital inputs	
Number of channels	1
Outputs	
Output type	4-color LED indicator
Digital outputs	
Number of channels	4
Mechanical data	
Design	Rectangular
Construction type designation	Q45
Dimensions	68,9 mm x 44,5 mm x 110,6 mm
Housing material	Plastic, PBT Lexan, Black
Cover	Lexan
Electrical connection	Connector
Antenna connection	Internal (wire loop)
Ambient conditions	
Ambient temperature	-40...+70 °C
Storage temperature	-40...+70 °C
Relative humidity	0...90 %
Protection class	IP67
Tests/approvals	
Approvals	CE, cURus, CSA
MTTF	67 Years acc. to SN 29500 (Ed. 99) 40 °C

Wiring Diagram

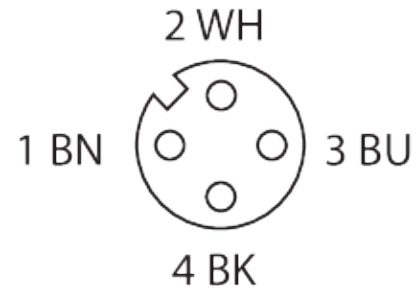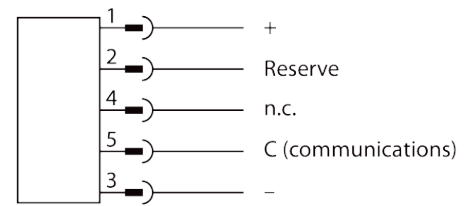

Functional principle

The Q45 wireless nodes can be integrated into a DX80 wireless network in star topology. Thanks to the integrated battery, these devices work fully autonomously and can be connected directly with any DX80 gateway or DXM controller. Some models include a sensor element or can be connected to external sensors or other transducers. Depending on the type of operation, the battery service life may last several years.
Conforms to EN 300 328: V2.2.2 (2019-02)

Technical data

Displays/controls


Error indication	LED, red
Excess gain indication	LED, red
Power-on indication	LED, Green

Mounting accessories

K50UX1CRA

3094613

Ultrasonic sensor, diffuse-mode sensor, 3 m range, serial interface for connection to DX80 nodes



M12FTH4Q

3025895

Temperature and humidity sensor, metal housing, protection class IP67, serial interface for connection to DX80 nodes

